



Structural Foam Crossover Models 203000 and 204000

IMPORTANT INFORMATION

Please Read And Save This Form

In the event you need to obtain Replacement Parts, we will need the Model Number of your Delta product. Please locate the Model Number of your product and list it in the space below.

Model No. _____ Date Purchased _____

Keys

Your Delta product is shipped with two keys. We have hundreds of different locks and key patterns to fit the locks. The Key Code for the key to fit the lock(s) for your Delta product is stamped on the key and on the cover of the key entry slot of the lock.

You will need this Key Code to obtain additional or replacement keys. Write the Key Code in the space below for future reference.

Key Code _____

To Obtain Keys And Other Replacement Parts

Contact our Customer Service Department at 800-643-0084 and Press 1 between the hours of 8:30 AM and 4:30 PM Central Time Monday – Friday. Or, by email at parts@danahertool.com.

To help us serve you, please have the above information available. We will need a street address to send you the item(s) you request.

Orders for Keys and other Replacement Parts are normally shipped within two business days.

Prices for Parts do not include shipping charges and are subject to applicable taxes.

You can send a money order or personal check for parts orders. COD shipments not available.

We also accept MasterCard and Visa information only by phone. Do not send Credit Card information by email for your protection.

Crossover Installation Instructions

A Crossover can be installed by drilling holes in tops of side walls for bolts or using J-Bolts which do not require holes in side walls.

To obtain a set of J-Bolts, call our Customer Service at 800-643-0084 between 8:30 AM and 4:30 PM Central Time.

Place the Crossover in the desired location with the lid fully open to insure proper clearance between the lid, back wall and cab. Be sure the fully open lid will not hit the rear window. Mark the locations of the two slots on each end on the top of the bed side walls. Remove the Crossover.

If you are using J-Bolts, follow Steps A – F. If you are bolting it on the side walls, follow Steps G – I.

- A. Determine if J-Bolts can be hooked under side wall tops and line up with the locations marked. See Figure 1. If so, proceed to Step C.
- B. If J-Bolts can not be aligned with the locations marked, determine where J-Bolts can be located on the side walls. Carefully measure locations. Drill 5/16" holes in Crossover to match locations of J-Bolts.
- C. Insert J-Bolt threaded ends up through the holes from the bottom. (See Figure 1). Place nylon retaining washer on J-Bolts to hold them in place. Put the Crossover in the desired location. Hook the curved ends of J-Bolts under tops of side walls.
- F. Use a flat washer and lock nut on J-Bolts to hold Crossover in place.
- G. Determine if 3/8" dia. holes drilled in locations marked will damage wiring under tops of side walls. If not, drill holes and proceed to Step I.
- H. If holes cannot be drilled in the locations marked, determine where holes can be drilled and measure these carefully. Drill holes in ends of the Crossover to match the new locations.
- I. Place mounting pads under Crossover where it sits on side walls.
- J. Position Crossover so holes match. Put 5/16" x 1" hex head bolts with flat washers in holes from top and tighten with nuts on bottom.

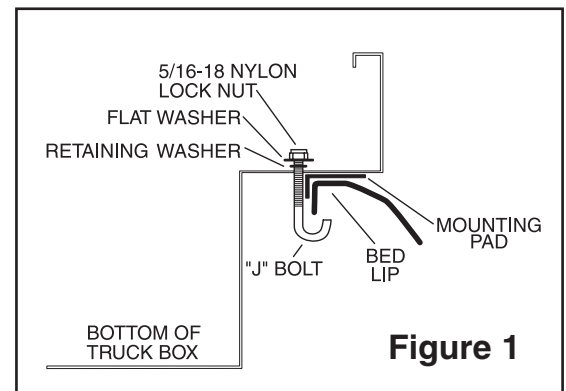


Figure 1

(see back for more information)

One-Year Limited Warranty

This warranty is made by Delta Consolidated Industries, Inc. (DCI) to the original purchaser of Delta Brand Structural Foam Model 203000 and 204000 Crossovers from DCI and is valid for one (1) year from date of purchase upon presentation of a copy of the original sales receipt at the time of the warranty claim. DCI warrants that the products it makes are free from defects in materials and workmanship at the time of the sale.

Lifetime Limited Warranty On Structural Foam Construction

If the Structural Foam Crossover body or lid fail due to defect in material and workmanship during the usable life of the product, DCI will at its option repair or replace it at no-charge.

These warranties do not cover damage caused by accident or unreasonable or unintended use of the product. Modification, disassembly and / or re-assembly of the product will invalidate this warranty. Damage to the contents of the box, vehicle or other consequential damages is excluded from this warranty.

In the case of a nonconforming product, you should return the product to the point of purchase or an authorized Delta retail / dealer store. The retailer or dealer will either repair or replace the product at their option if the product should prove to be defective in material or workmanship.

If you feel that you have not been offered a satisfactory resolution to your Warranty issue, you may submit your request in writing for further consideration to the Warranty Department, Delta Consolidated Industries, Inc., P O Box 1846, Jonesboro, AR 72403-1846. Explain in writing the nature of the problem and why you feel you have not been offered a satisfactory solution. Be sure to include the Model Number of the product and a copy of the sales receipt.

Note: This warranty applies solely to domestic sales and shipments made within the continental USA. It gives you specific legal rights in the USA, and you may have other rights imposed by one or more states in the USA.